

LAVISH[®]
CERAMICS

75X300MM

3X12 INCH
CERAMIC WALL TILE
PLAIN (GLOSSY & MATT)

Starco introduces to you a solitary gem, an amalgamation of color and exotic designs. This assemblage is sort in order to fulfill the need of the hour of both domestic and cosmopolitan market. A definite eye-turner, and eye-catching extravaganza.

75X
300
MM

All of our products can endure harsh conditions and are long lasting as they are personally matured under stern scrutiny. Each and every design is developed under fully automatic Italian machineries. All of our best efforts are teamed together to achieve unparalleled results.

The management at STARCO has been maintaining its top game. They are highly professional, competent, and accomplished to attain the vision of making STARCO the most trusted brand in the tiles industries.



AN AMALGAMATION OF COLOR & EXOTIC DESIGNS



Glossy
Surface

8 PLAIN
COLORS

Redefine your space with the glorious glossy surfaces that give free rein to your imagination.




Matt
Surface

3 PLAIN
COLORS


Let the incredible vibrancy of matt surfaces transform your room into a sumptuous haven.

**CERAMIC
WALL TILE**

75X300MM

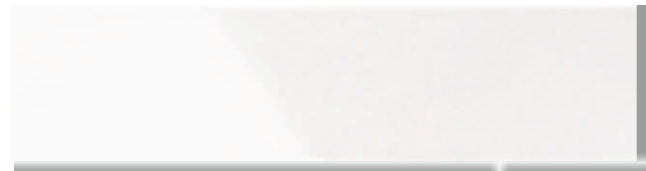

White

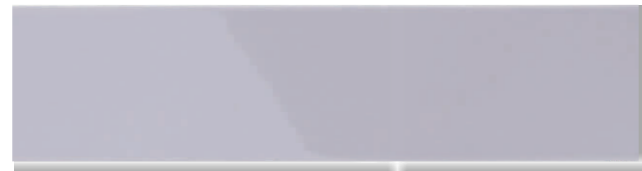

Grey




Black



Oasis Green



Aqua Green

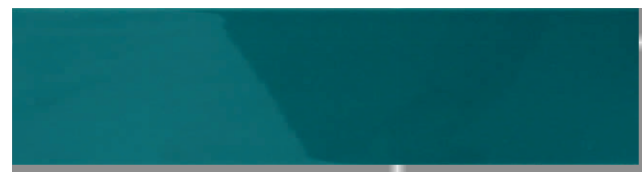

Aqua Blue



Orange



Blood Red



Hauly Amies
19 BRISLE RD. LONDON

White
Plain | Glossy



Grey
Plain | Glossy




Aqua Blue
Plain | Glossy


Aqua Green
Plain | Glossy



Black
Plain | Glossy

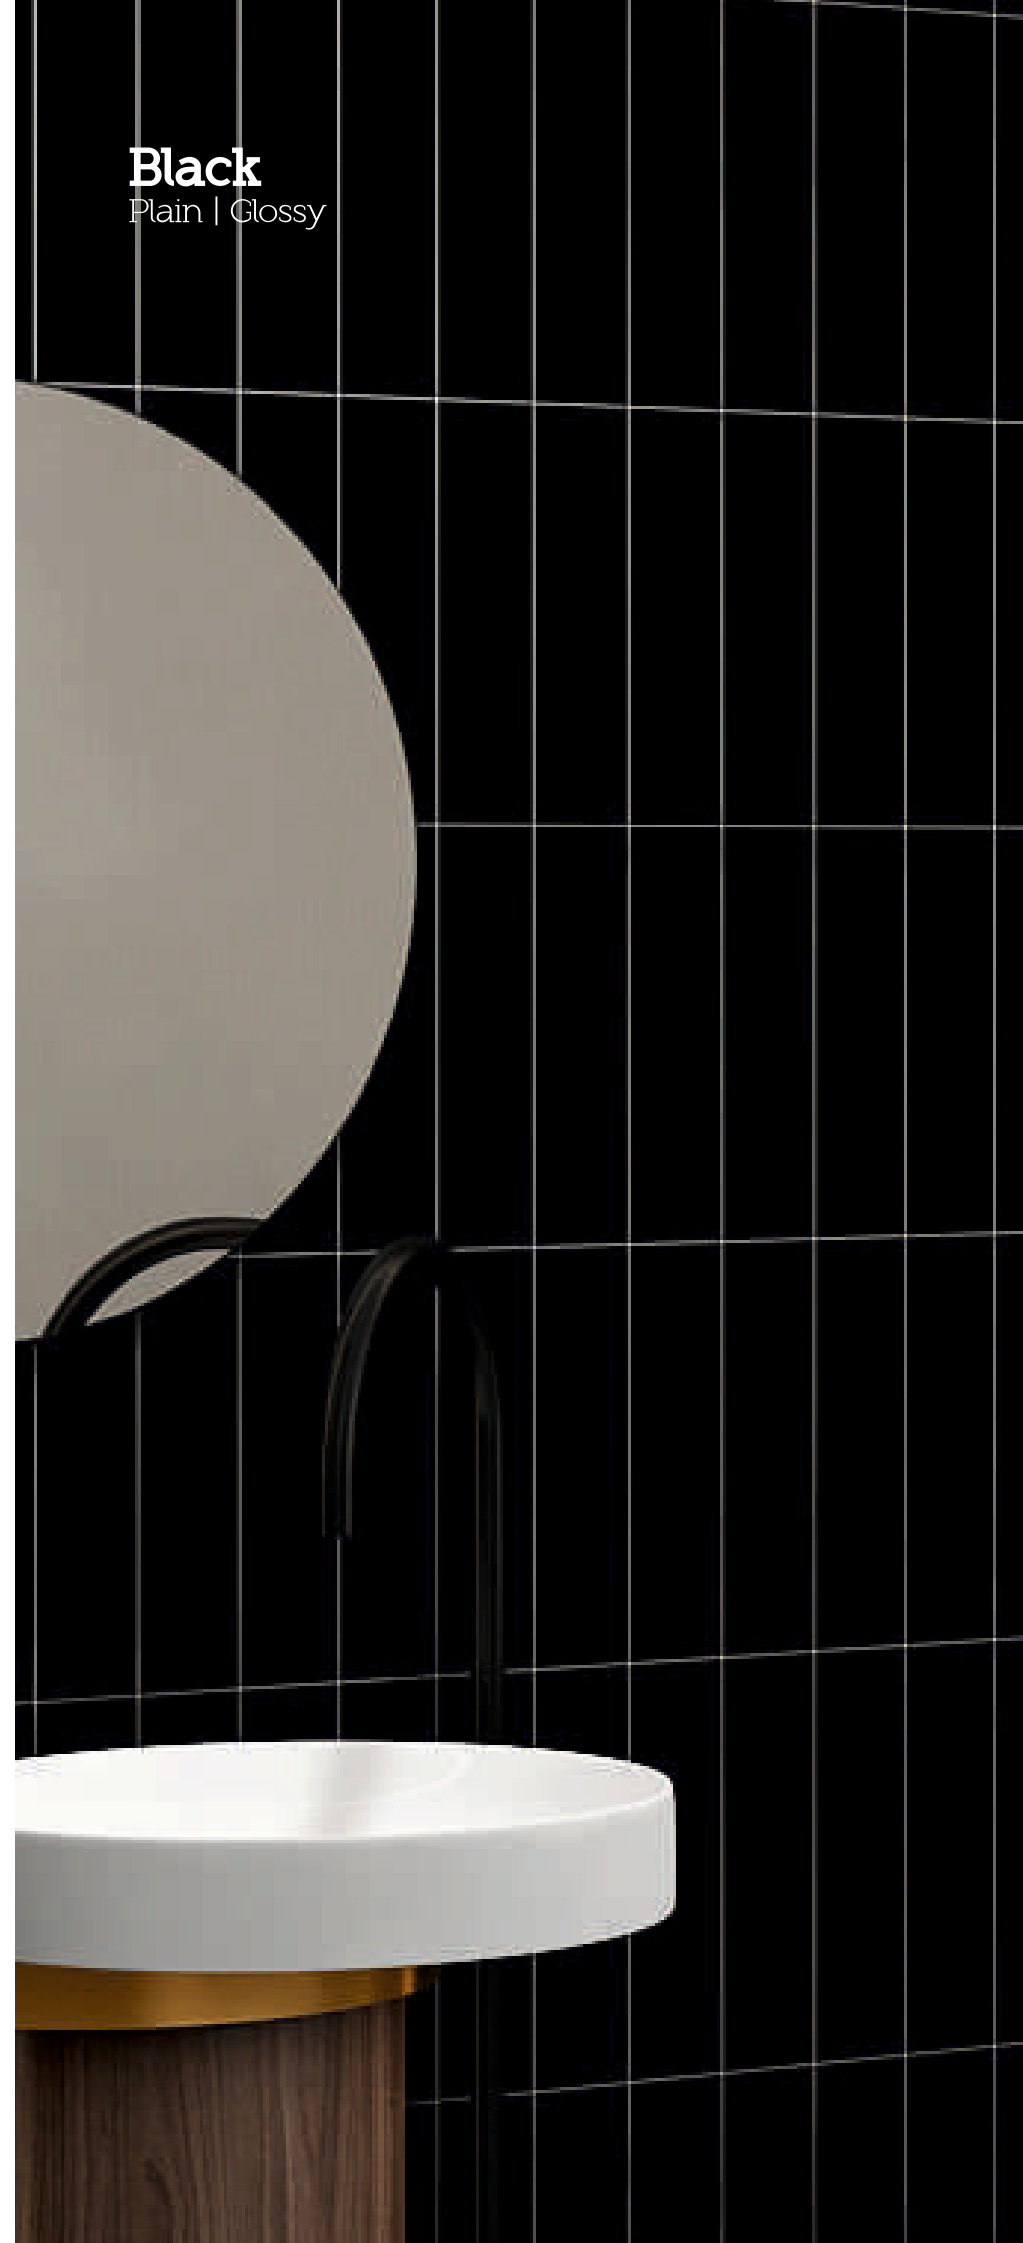

Orange
Plain | Glossy

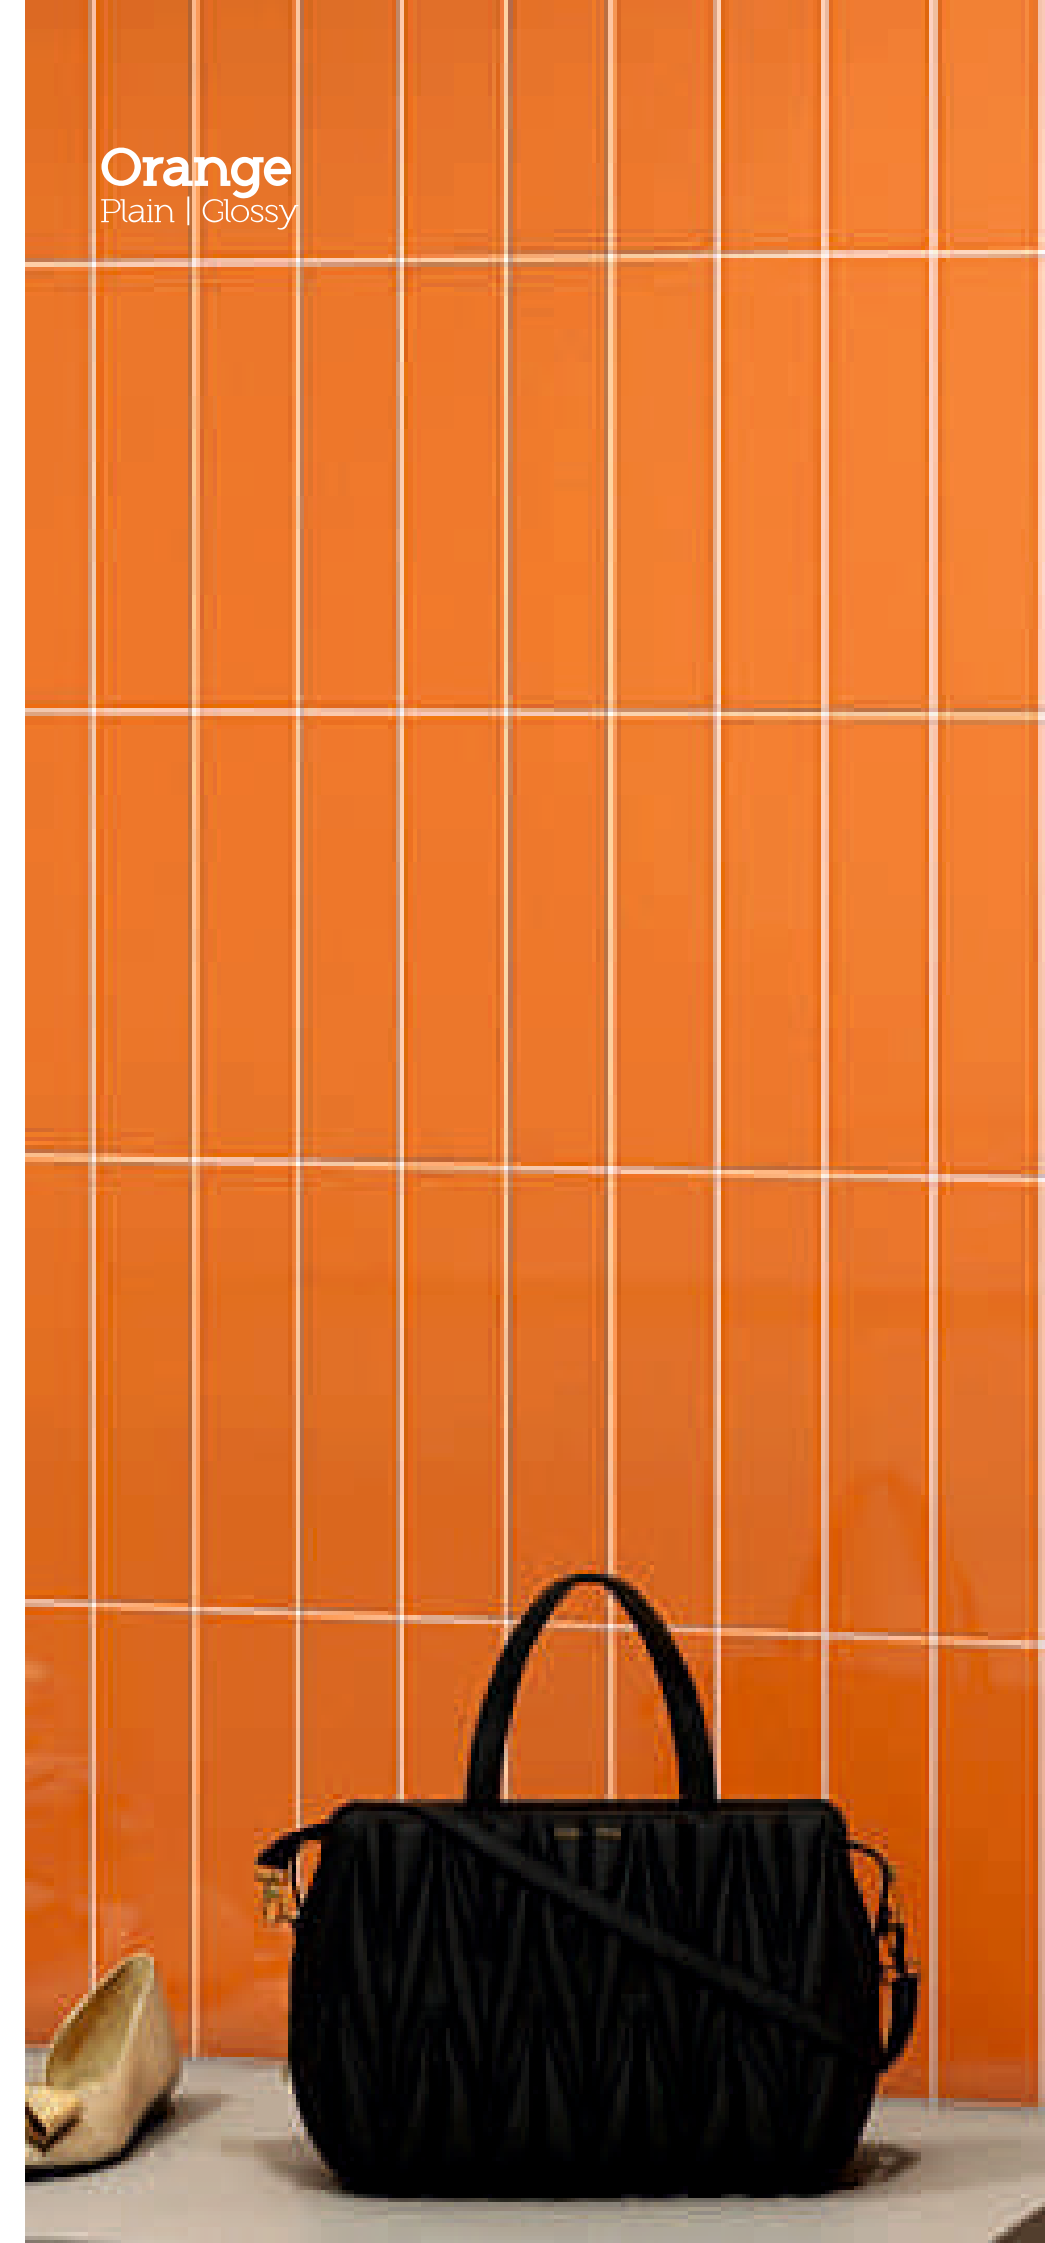



White



Grey



Black





White
Plain | Matt



Black
Plain | Matt

TECHNICAL SPECIFICATION as per ISO 13006:2018 - ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.15%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 2.65%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.25%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.28%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.20%	ISO-10545-2
5	Water Absorption	>10%	14.04%	ISO-10545-3
6	MOR	Minimum 12 N/mm ³	20.09 N/mm ³	ISO-10545-4
7	Breaking Strength	Minimum 600 N	650.99 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GB (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle (PASS) Fully Resistance	ISO-10545-9
13	Coefficient of Linear Thermal Expansion	Maximum 9 x 10 ⁻⁶	5.92 x 10 ⁻⁶	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm ²	0.012mg/dm ²	ISO-10545-15

PACKAGING DETAILS


SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
75X300MM (3"X12")	PLAIN	8.00MM	44	0.99	10.66	13.500

Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complaints should be brought to our dealer's notice before laying the tiles.
- colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.

- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls



LAVISH[®]
CERAMICS